


End mills and micro end mills with oriented and accelerated lubrication

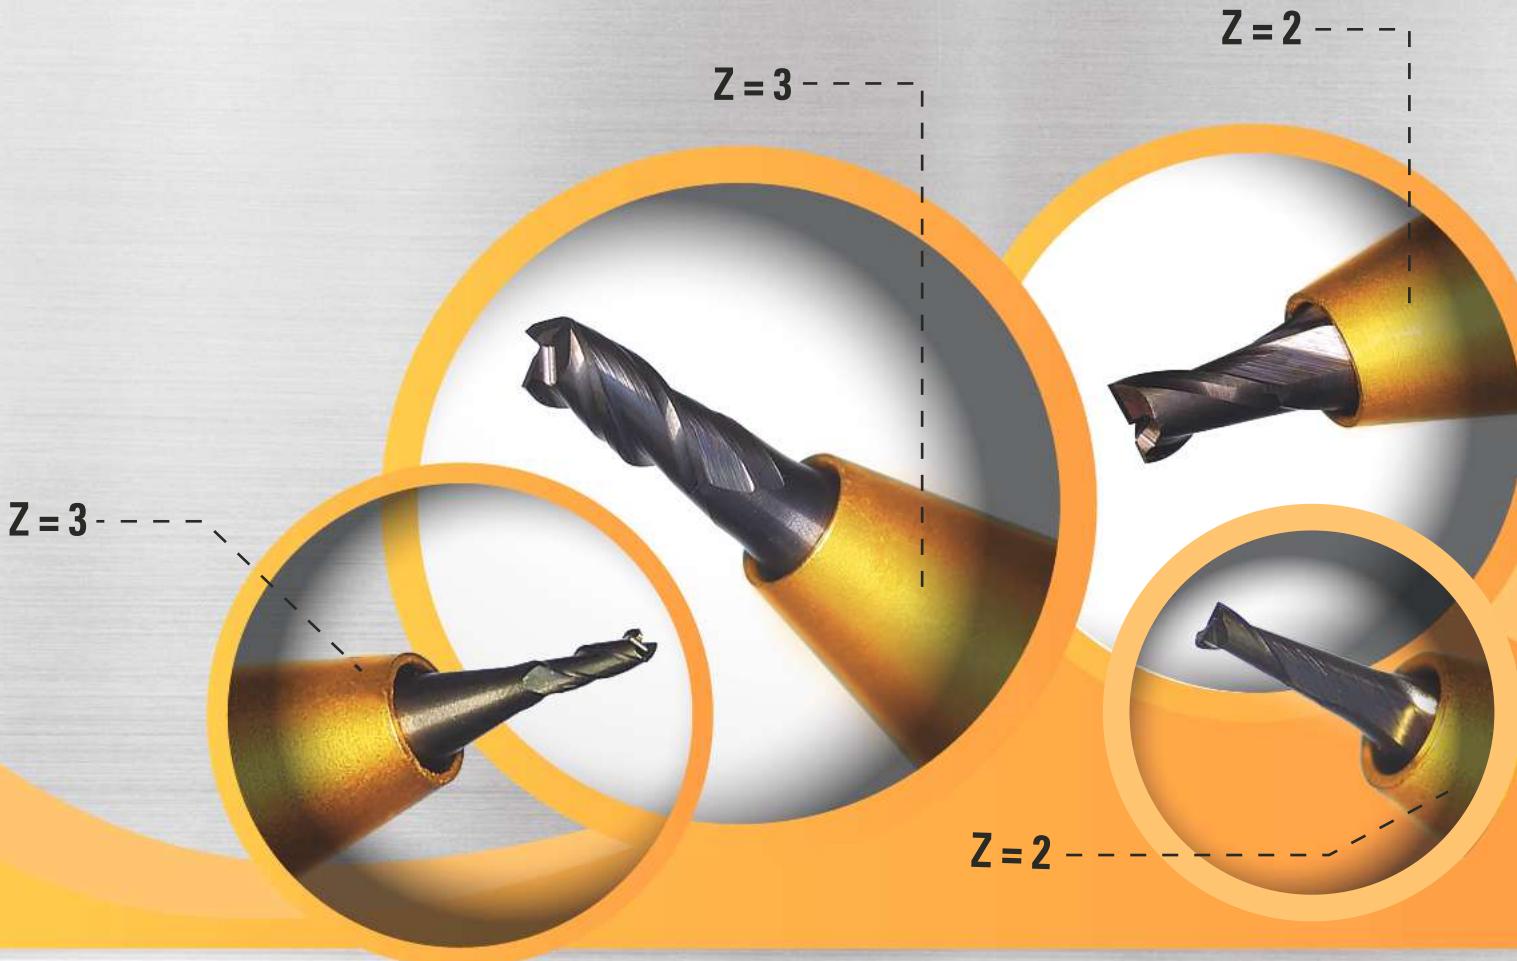

DIXI Polytool SA presents its innovative **DIXI COOL+** concept for its high performance end mills and micro end mills.

This product series, with its pending patent, offers an oriented lubrication ring brings the lubricant nearest to the cutting zone and to accelerates its speed.

The products are available with Z=2 for Ø0.30 à Ø5.00mm, – DIXI 7442 COOL+ series with Z=3 for Ø0.30 à Ø5.00mm, – DIXI 7443 COOL+ series



DIXI COOL+ CONCEPT, THE LUBRICANT IS ORIENTED AND ACCELERATED !

Thank to the DIXI COOL+ concept :

- The cutting forces on the tool are reduced between 20-50%.
- The temperature in the working zone is strongly reduced.
- Easy chip evacuation.




This lubrication concept allows to increase :

- ap et ae.
- Cutting speed Vc and feed rate Vf.

During roughing, the chip volume is multiplied by 2 in comparaison to traditional end mills.

The difficult to machine material as titanium, stainless steel, super allongs are machined efficiently.

Test Ø1 - 1.4441 stainless steel

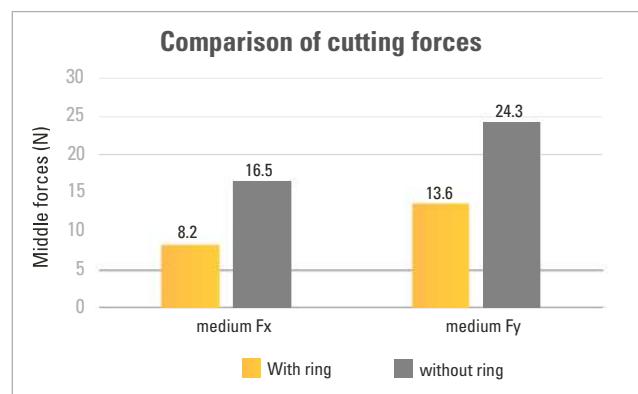


CUTTING PERFORMANCE

Tests of maximal Vf_{max} in slotting for a Ø1 Z=2 DIXI 7442 COOL+ end mill



Maximal Vf_{max}

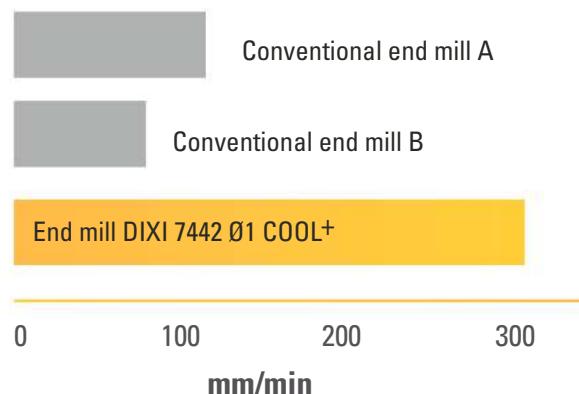


Test realized in 1.4441 in stainless steel

Rotation 15'000 tr/min (vitesse de coupe 50 m/min)
ap and ae = 1 mm
High pressure pump, 60 bars - 7% emulsion
3 axis machining center

DIXI COOL+ CONCEPT, THE LUBRICANT IS ORIENTED AND ACCELERATED !

THE INNOVATION COMBINES 3 CHARACTERISTICS UNIQUE TO DIXI COOL+ CONCEPT

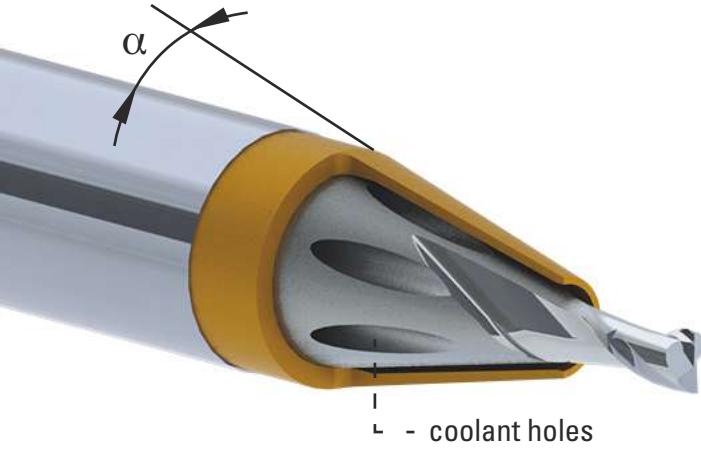


1 LUBRICANT IS ORIENTED

The lubricant crosses the tool in 2 steps :

- Through the multiple coolant holes integrated in the body of the tool.
- Through the division zone of lubricant distribution between the directional ring and the tool.


The α angle of the cone orients the lubricant closest to the cutting zone end restrains inertia effect at the tip of the tool even with high rotation.

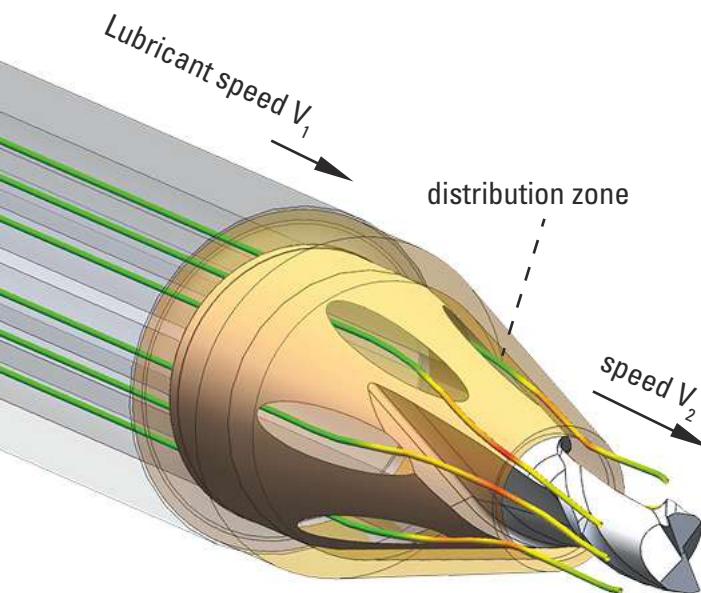

2 LUBRICANT IS ACCELERATED, ACCORDING TO VENTURI EFFECT - FLUID DYNAMICS

Under constant rate of flow, the exit speed V_2 of the lubricant is increased due to the difference of section between the 6 extering cooling holes and the circular exit ring.

In order to guarantee this $V_2 > V_1$ speed increase, the entering surface of the lubricant is always larger than the one of the exiting circular ring.

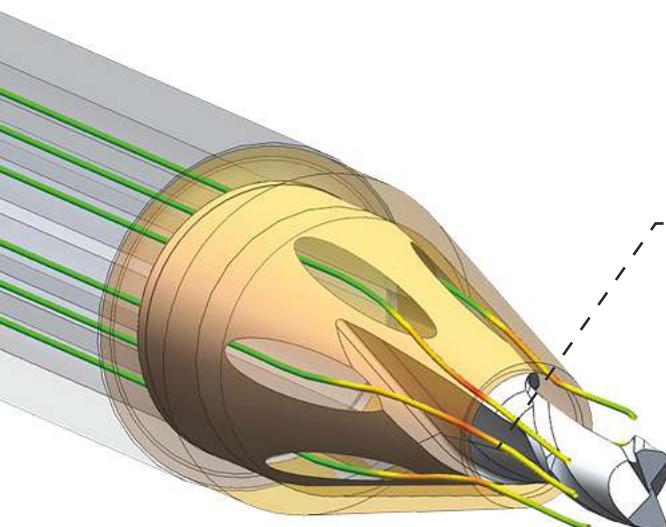

3 THE LUBRICANT REACHES THE CUTTING FACES


- Part of the lubricant is guided in the flutes of the tool on the cutting faces.

DIXI 7442 COOL+

DIXI 7443 COOL

END MILLS, REINFORCED SHANK
WITH ACCELERATED LUBRICATION


Z = 2

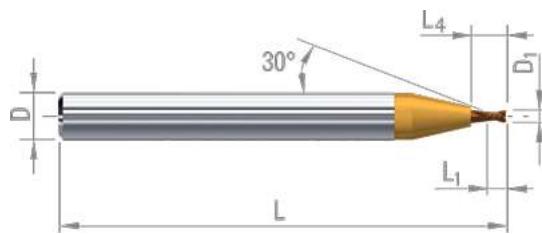

D_1	L_1	D_{h5}	L	L_4	CARBIDE	C-TOP
$\varnothing < 0.10 - 0/-0.01$						
$\varnothing < 2.00 - 0/-0.02$						

0.3	0.45	4	38	2.10	381928	381944
0.4	0.60	4	38	2.10	381929	381945
0.5	0.80	4	38	2.10	381930	381946
0.6	0.90	4	38	2.90	381931	381947
0.7	1.10	4	38	3.00	381932	381948
0.8	1.20	4	38	3.00	381933	381949
0.9	1.40	4	38	3.00	381934	381950
1.0	1.50	4	38	3.00	381935	381951
1.1	1.70	4	38	3.00	381936	381953
1.2	1.80	4	38	4.10	381937	381954
1.3	2.00	4	38	3.90	381938	381955
1.4	2.10	4	38	3.80	381939	381956
1.5	2.30	4	38	3.90	381940	381957
1.6	2.40	6	55	4.50	383393	384649
1.7	2.60	6	55	3.90	384641	384650
1.8	2.70	6	55	3.90	384642	384651
1.9	2.90	6	55	5.20	384644	384653
2.0	3.00	6	55	5.10	384645	384654
2.5	3.80	6	55	5.00	384646	384655
3.0	4.50	6	55	6.60	383394	384656
4.0	6.00	8	64	8.80	384648	384657
5.0	7.50	8	64	10.60	383396	384658

END MILLS, REINFORCED SHANK
WITH ACCELERATED LUBRICATION

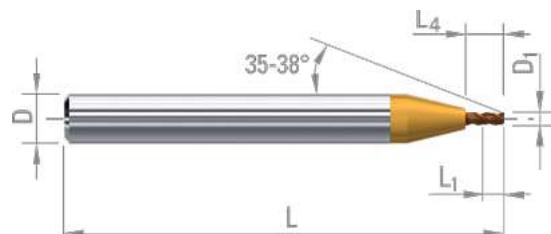

D_1	L_1	D_{h5}	L	L_4	CARBIDE	C-TOP
$\varnothing < 0.10 - 0/-0.01$						
$\varnothing < 2.00 - 0/-0.02$						

0.3	0.70	4	38	1.80	388775	388797
0.4	0.90	4	38	1.90	388776	388798
0.5	1.10	4	38	2.80	388777	388799
0.6	1.40	4	38	2.80	388778	388800
0.7	1.60	4	38	2.90	388779	388801
0.8	1.80	4	38	3.00	388780	388802
0.9	2.00	4	38	3.00	388781	388803
1.0	2.20	4	38	3.10	388782	388804
1.1	2.40	4	38	3.20	388783	388805
1.2	2.60	4	38	4.30	388784	388806
1.3	2.80	4	38	4.40	388785	388807
1.4	3.00	4	38	4.50	388786	388808
1.5	3.20	4	38	4.50	388787	388809
1.6	3.40	6	55	5.20	388788	388810
1.7	3.60	6	55	5.20	388789	388811
1.8	3.80	6	55	5.30	388790	388812
1.9	4.00	6	55	6.70	388791	388813
2.0	4.30	6	55	6.70	388792	388814
2.5	5.30	6	55	7.10	388793	388815
3.0	6.30	6	55	9.20	388794	388816
4.0	8.30	8	64	12.00	388795	388817
5.0	10.30	8	64	15.10	388796	388818

DIXI COOL+, ONE CONCEPT, SEVERAL POSSIBILITIES

The DIXI COOL+ concept is not limited to z=2 end mills.

The working part of the tool can be designed according to a ball nose end mill, a thread mill, a whirling tool or a reamer.

Below some examples of DIXI COOL+ designed tools.



DIXI POLYTOOL S.A.

Av. du Technicum 37
CH - 2400 Le Locle

T. +41 (0)32 933 54 44
F. +41 (0)32 931 89 16

dixipoly@dixi.ch
www.dixipolytool.com