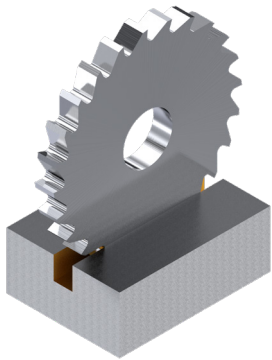


		VDI 3323		CARBIDE Vc[m/min]
P	Unalloyed steel, leaded steel	1 - 5		120
	Low alloyed steel < 800 N/mm²	6 - 9		105
	High-alloy steel > 800 N/mm², stainless steel ferr.- marten.	10 - 13		75
M	Austenitic stainless steel < 700 N/mm²	14.1-14.2		100
	Nickel-free stainless steel/DUPLEX >700 N/mm²	14.3-14.4		75
K	Grey cast iron < 250 HB	15 - 16		110
	Ductile, malleable, nodular cast iron > 250 HB	17 - 20		95
N	Wrought aluminium alloy < 12% Si	21 - 22		350
	Cast aluminium alloy >12% Si	23 - 25		325
	Copper alloy good machinability with Pb	26		325
	Copper alloy with difficult machinability	27 - 28		225
	Plastic, wood	29 - 30		165
	Gold, silver	-		225
S	Refractory alloy, Fe, Ni, Co base	31- 35		30
	Titanium, titanium alloy	36 - 37		60

$$n \text{ [rpm]} = \frac{V_c \text{ [m/min]} \times 1000}{\pi \times D_1 \text{ [mm]}}$$

$$V_f \text{ [mm/min]} = n \text{ [rpm]} \times f_z \text{ [mm]} \times Z$$

Feed per tooth fz [mm]					
Ø D ₁ 15.00 - 30.00	Ø D ₁ 30.00 - 50.00	Ø D ₁ 50.00 - 80.00	Ø D ₁ 80.00 - 125.00	Ø D ₁ 125.00 - 160.00	
0.0015 - 0.0034	0.003 - 0.005	0.004 - 0.007	0.006 - 0.010	0.008 - 0.011	
0.0014 - 0.0030	0.002 - 0.005	0.004 - 0.006	0.005 - 0.009	0.007 - 0.010	
0.0012 - 0.0026	0.002 - 0.004	0.003 - 0.006	0.004 - 0.008	0.006 - 0.009	
0.0012 - 0.0026	0.002 - 0.004	0.003 - 0.006	0.004 - 0.008	0.006 - 0.009	
0.0011 - 0.0024	0.002 - 0.004	0.003 - 0.005	0.004 - 0.007	0.005 - 0.008	
0.0018 - 0.0040	0.003 - 0.006	0.005 - 0.009	0.007 - 0.012	0.009 - 0.013	
0.0015 - 0.0034	0.003 - 0.005	0.004 - 0.007	0.006 - 0.010	0.008 - 0.011	
0.0023 - 0.0050	0.004 - 0.008	0.006 - 0.011	0.008 - 0.015	0.011 - 0.017	
0.0020 - 0.0042	0.004 - 0.007	0.005 - 0.009	0.007 - 0.013	0.010 - 0.015	
0.0023 - 0.0050	0.004 - 0.008	0.006 - 0.011	0.008 - 0.015	0.011 - 0.017	
0.0018 - 0.0040	0.003 - 0.006	0.005 - 0.009	0.007 - 0.012	0.009 - 0.013	
0.0023 - 0.0050	0.004 - 0.008	0.006 - 0.011	0.008 - 0.015	0.011 - 0.017	
0.0020 - 0.0042	0.004 - 0.007	0.005 - 0.009	0.007 - 0.013	0.010 - 0.015	
0.0008 - 0.0016	0.001 - 0.003	0.002 - 0.004	0.003 - 0.005	0.004 - 0.006	
0.0015 - 0.0034	0.003 - 0.005	0.004 - 0.007	0.006 - 0.010	0.008 - 0.011	

Values based on use of cutting oil. The cutting parameters are very strongly influenced by external parameters, such as tool and workpiece stability, etc.
The cutting conditions must be adapted to the operating conditions !